

- Dispensing pump suitable for use with a trigger nozzle and meter
- Depress trigger - pump starts
- Release trigger - pump stops
- Dry-run protected
- 230v/1/50Hz electric motor with thermal overload cut-out, IP54 enclosure
- Light, easily portable, compact and tough
- Quick & simple wiring connection

WARNING

Explosive hazard. Do not pump gasoline, solvents, thinners or other light hydrocarbons

MATERIALS OF CONSTRUCTION

Pump body: Cast iron

Shaft: Stainless steel

Shaft seal: Mechanical (carbon-ceramic)

Impeller: Brass

Motor: 230v/1ph/50Hz IP54 0.55kW with thermal cut out

Electronic controller housing:


Glass fibre reinforced polyamide

Diaphragm: Viton

Flow valve: Brass

Control box: Self extinguishing thermoplastic resin

PERFORMANCE ON DIESEL

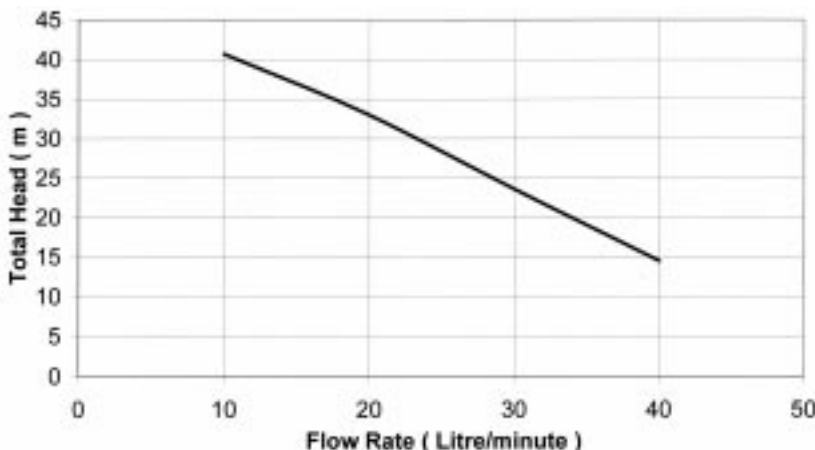

Electronically controlled
**DIESEL
FUEL
PUMP**
model **CW446**



with 1-phase
A.C. electric motor

- Delivers up to 40 litres/minute at 1.2 bar (18psi)
- Self primes up to 3m vertical lift
- Automatic on/off control for fuel dispensing

...from the specialists

**CLEGHORN
WARING**

tel: +44(0)1462 480380

fax: +44(0)1462 482422

mail@cleghorn.co.uk

www.cleghorn.co.uk

Icknield Way • Letchworth
Hertfordshire • SG6 1EZ • UK